

SYSTEM/MODEL: RELAY

MODIFICATION: Modify RY-PA for normally closed contacts

DIFFICULTY LEVEL: 3 - Moderate - Removal or replacement of internal components.

COMPONENTS REQUIRED: NONE

INSTR/OPERATIONS: 1. Open RY-PA to access relay.


2. Locate yellow wire soldered to relay leg marked "3". Remove from that leg and resolder wire to leg marked "4".

REFERENCE DRAWING #: 1198-901

Aiphone's product warranty applies to products properly modified using these instructions.
However, if a unit is damaged as a result of improper modification, the warranty does not apply.

MODIFICATION DIAGRAM

CONVERTING THE RY-PA TO NORMALLY CLOSED

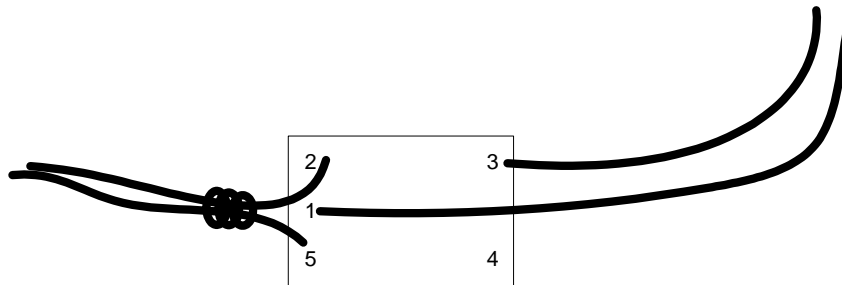

Bottom view of relay within RY-PA as it comes from the factory. (Normally Open)



Bottom view of relay within RY-PA after field modification. (Normally Closed)