

**DESCRIPTION:**

The JP-4HD is a video sub master station for use with the JP-4MED master station. A maximum of 7 sub master stations can be used in the JP Series. The JP-4HD offers a 7" color touchscreen LCD and allows for handset (duplex) and hands-free (VOX) communication. This unit is equipped with a door release button for the user to allow visitor entry. The JP-4HD is also equipped with PTZ and brightness controls, giving the user control of the door station camera angle and camera lighting for better visibility.

The JP-4HD connects to either the master station or JP-8Z distribution unit using CAT-5e / CAT-6 cable.


JP-4HD FEATURES:

- 7" Color touchscreen LCD
- Hands-free (VOX) or handset communication
- Door release button
- Optional service button
- PTZ and brightness control
- Selectable call tones (8)
- Station partitioning with security code
- All Call to inside stations
- Door monitoring
- Continuous room monitoring

JP-4HD

Sub-Master Station

FEATURE CALL-OUT:

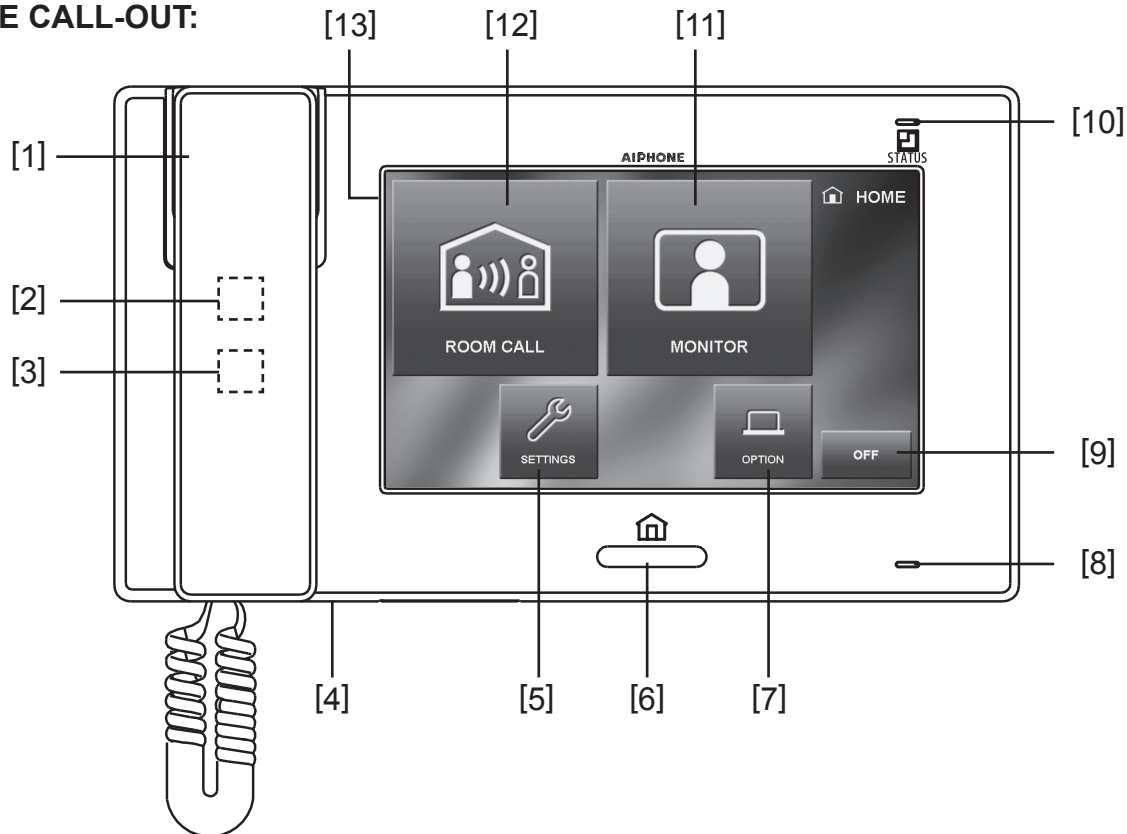

FEATURE CALL-OUT DEFINITIONS:

- [1] Handset
- [2] Speaker
- [3] Hearing aid T-mode symbol
- [4] Reset button
- [5] Settings button (touchscreen)
- [6] Home button
- [7] Option button (touchscreen)
- [8] Microphone
- [9] Off button (touchscreen)
- [10] Status LED
- [11] Monitor button (touchscreen)
- [12] Room call button (touchscreen)
- [13] Color LCD touchscreen

SPECIFICATIONS:

- | | |
|----------------|--|
| Power Source: | 24V DC - use PS-2420UL |
| Consumption: | 200mA (max) |
| Communication: | |
| Handset | Simultaneous communication |
| Hands-free | Auto-voice actuation |
| Monitor: | 7" TFT color touchscreen LCD |
| Pixels: | 800 x 480 |
| Mounting: | Surface wall mount or desk mount using MCW-S/A (sold separately) |
| Temperature: | 32-104°F (0-40°C) |
| Dimensions: | 5-11/16" H x 10-1/16" W x 1-7/8" D |
| Weight: | Approx. 1.72 lbs (780g) |