



■ PRODUCT DRAWING

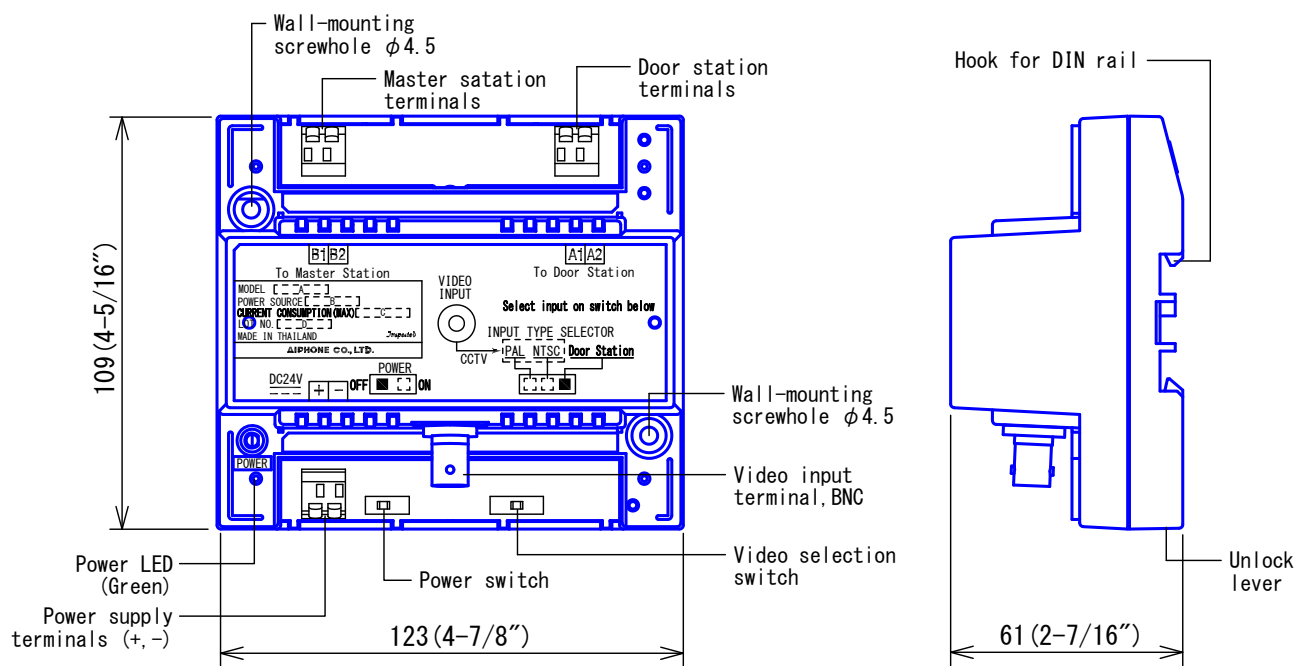

● MOUNTING

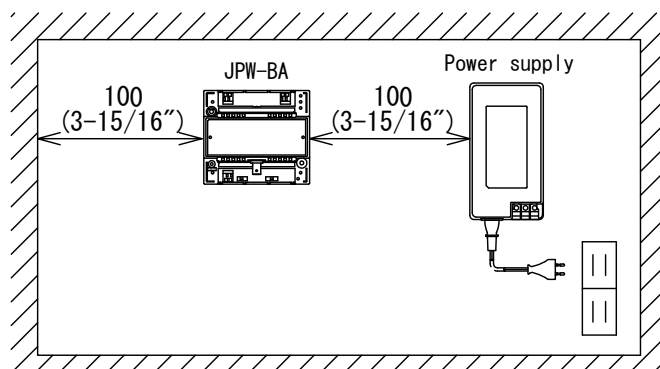


Locate JPW-BA together with Power supply inside an Enclosure box or other protected for limited access.


■ SPECIFICATIONS

Power source	24V DC. Supplied from Power supply (JP system or separate).		
Current consumption	90mA (max.)		
Ambient temperature	0~40°C (+32° F - +104° F)		
Wiring distance	$\phi 0.65$ (22AWG)	$\phi 1.0$ (18AWG)	
JPW-BA - Door station	100m (330')	200m (650')	
JPW-BA - Master station	50m (165')	100m (330')	
JPW-BA - power supply	50m (165')	100m (330')	
Mounting	Surface wall mounting or DIN rail (W-DIN11).		
Housing	Fire-retardant ABS plastic.		
Weight	Approx. 200g (0.44lbs.)		
Unit color	Gray (5Y8/1 Munsell Approximation)		
Remarks	Used for: JP-4MED		
DESCRIPTION LONG DISTANCE ADAPTOR (JP series)	FIG. NAME PRODUCT/SPECIFICATIONS	UNIT mm	DATE 6 October, 2014
MODEL NO. JPW-BA	FIG. NO. 59767-1-2	PAGE 1/2	REVISION 1 AIPHONE

■ WIRING DIAGRAM

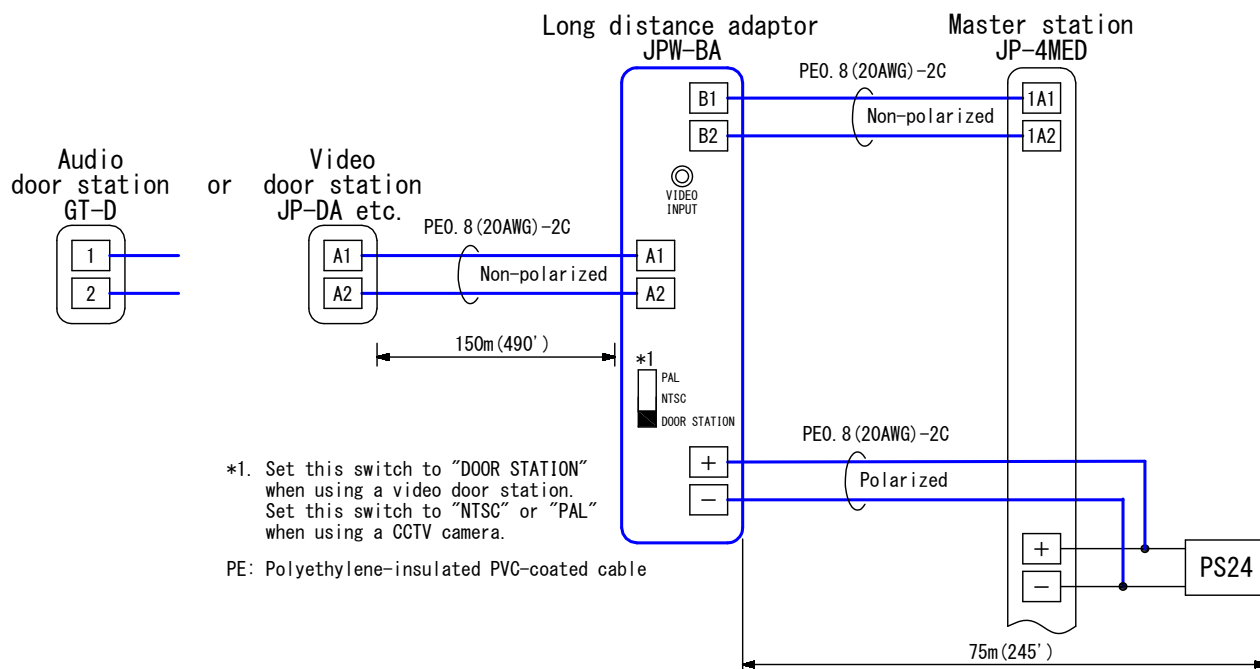

- Connecting a CCTV camera and an audio door station in place of a video door station

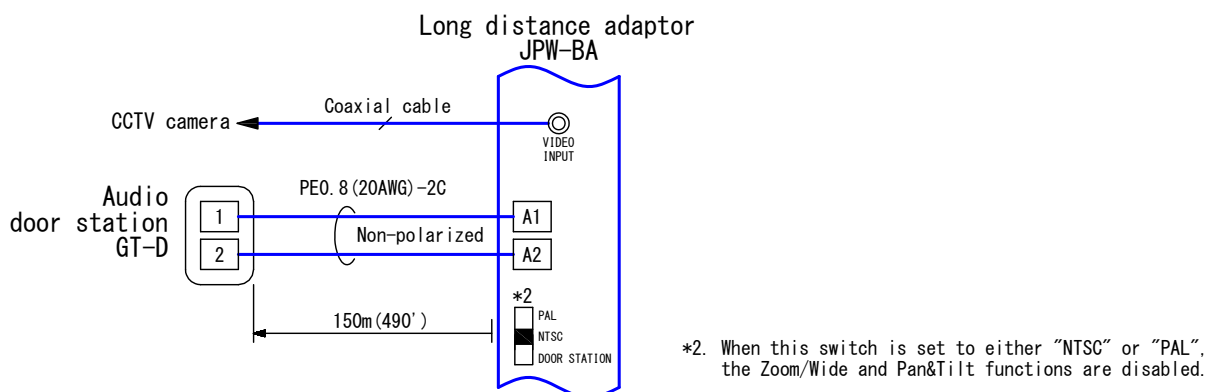

■ RESTRICTIONS

- JPW-BA is compatible only with JP series.
- When a single Power supply is used for both Master station and JPW-BA, do not common connecting wires.
- Power supply for JPW-BA shall be for the same DC 24V voltage as for Master station.

■ FUNCTIONS

- Enabling a Video door station to be installed max. 300m(980') away from (Sub) Master station.

DESCRIPTION LONG DISTANCE ADAPTOR (JP series)	FIG. NAME WIRING/RESTR. /FCN.	UNIT mm	DATE 6 October, 2014
MODEL NO. JPW-BA	FIG. NO. 59767-2-2	PAGE 2/2	REVISION 1
AIPHONE			