AIPHONE

Simple Operation. Slim, Stylish Design.







3.5-INCH VIDEO INTERCOM



DOOR RELEASE

Allows you to release door entry and access control.



IP 54 DUST & WEATHER RESISTANT

Protected from dust ingress, and water spray.



SUB MASTER STATION

Provides a second on-site location to answer calls from your video door station.

Simple And Reliable Video Intercom for Your Life.







Suitable for










System Configuration

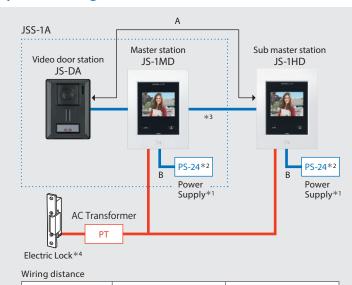

Willing distance			
	Ø 0.65 mm	Ø 0.8-1.2 mm	
А	50 m	100 m	
В	5 m	10 m	


- *1 If the distance between the master station (or sub master station) and the power supply is within 10m using Ø0.8mm cable, sharing of power supply is possible.
- *2 PS-24: PS-2420, PS-2420S, PS-2420UL, PS-2420BF, PS-2420DM
- *3 Master station and sub master station cannot intercommunicate.
 *4 An EL-12S (12V AC, 0.125A, 12V DC, 0.2A) or equivalent part and a separate AC transformer (or power supply) are required. Door release contact: 24V AC/DC, 1A (Minimum contact:
 - 100mV DC, 0.1mA) (N/O dry closure contact L, L).
 * Run separate cables for audio/video and door release.

Specifications

Video door station (JS-DA)	
Power supply	Supplied from master station
Camera	Complementary metal oxide semiconductor (CMOS)
Dimensions	129 (H) × 97 (W) × 35 (D) mm
Weight	Approx. 200g
Water/dust protection class	IP54

Master station (JS-1MD), Sub master station (JS-1HD)	
Power supply	24V DC
Display	3.5 inch TFT color LCD monitor
Dimensions	169 (H) × 129 (W) × 28 (D) mm
Weight	Approx. 320g (JS-1MD) Approx. 310g (JS-1HD)

Unit Dimensions



Distributed by:





ISO 9001

JQA-0291 Corresponding product: Standard product Order product AIPHONE CO.,LTD.

ISO 14001

JQA-EM0453
: HEADQUARTERS
TOYOTA FACTORY
TAIHOH SITE
DEVELOPMENT CENTER
AIPHONE CO.,LTD.

AIPHONE PTY LTD

Unit 11A, 2 Eden Park Drive Macquarie Park, NSW 2113 Australia

Tel.: +61 2-8036-4507 URL: aiphone.com.au

JS(E)1908A